

MINI WALLWASHER

# CF211



## FEATURES

- High Illuminance
- Uniform Light Distribution
- Compact Size
- Single Bin
- Excellent Thermal Dissipation
- Anti-glare Louver option
- Wide Range of Beam Angle Options

- Adjustable Luminaire Angle
- 3 Lengths Available: 200, 300, 500mm

## APPLICATIONS

- Architectural Lighting
- Façade Lighting
- Directional Lighting
- Wall Washing
- Outdoor Lighting

## SPECIFICATIONS

### DIMENSION

Size	36 mm (W) x 28.7 mm (H)		
Unit length	500 mm	300 mm	200 mm
Storage temperature	-30°C to 80°C		
Operating temperature	-10°C to 50°C		

### OPTICAL

Color temperature	2700K / 3000K / 4000K
CRI	>80 / >90
SDCM	<3 / Single Bin
Efficacy <sup>*1</sup>	120 lm/W
LED per meter	20
Lifetime LM-80	>60000 hrs

### ELECTRICAL


Power input	350 mA		
Power consumption	500 mm 10W	300 mm 6W	200 mm 4W
Dimming (by external driver)	0-10V / 1-10V / DALI / DMX / PWM		

### CERTIFICATIONS

IP class	IP40 / IP67
Safety standard	EN55015 EN61000-3-2 EN61000-3-3 EN61547 EN62031 EN62471 EN62493 EN62778

<sup>\*1</sup> Typical value based on 3000K, CRI>80, 350mA


# DIMENSION

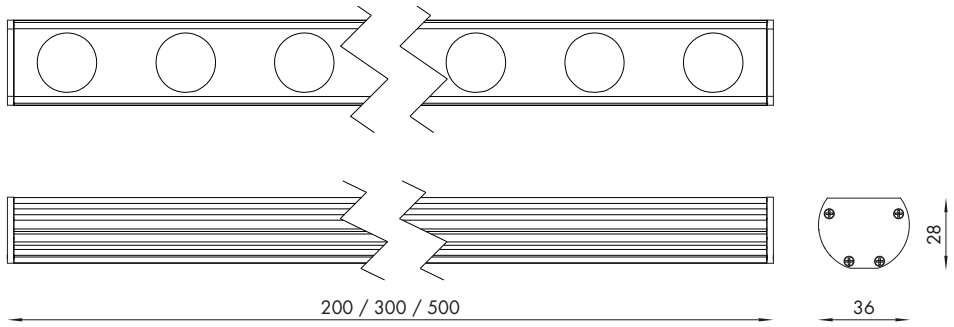

# ACCESSORIES OPTIONS



Mounting Bracket  
M00045



FUJI 2 Louver  
Black (Gloss)  
M00102



MEGUMI 2 Louver  
Black (Gloss)  
M00213



200mm Connection IP67 Cable  
E00127



3m Connection IP67 Cable  
E00124



3m Extension IP67 Cable  
E00157



Y-Joint Serial IP65 Cable  
E00172




Field IP6 Connector  
E00206



Cable  
E00390

## PHOTOMETRIC

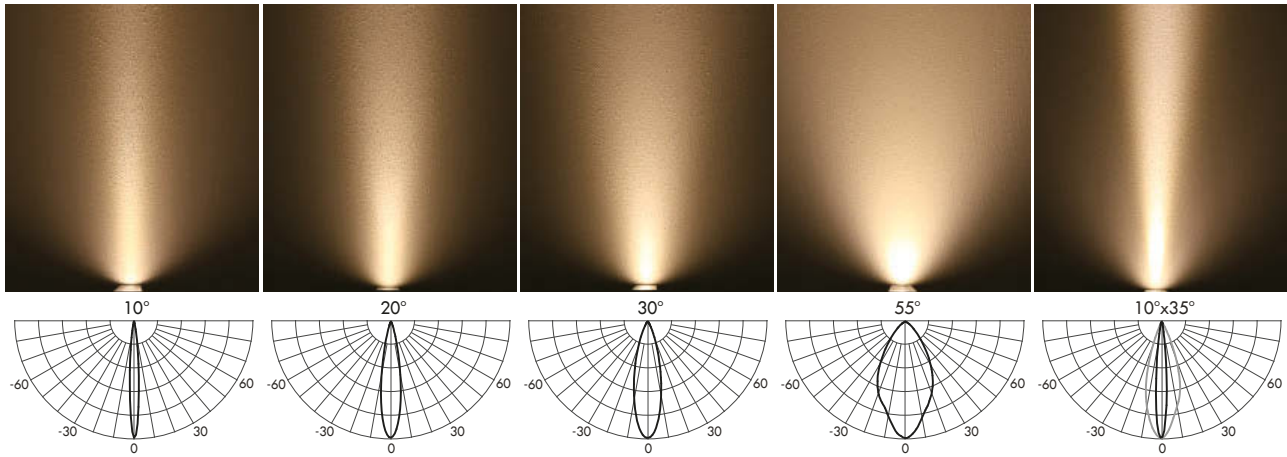

## TYPICAL LUMEN VALUES

PER METER, 350MA

	10°	20°	30°	55°	10°x35°
2700K	2200	2250	2250	2100	1900
3000K	2300	2400	2400	2250	2050
4000K	2500	2600	2600	2400	2200

## ORDER CODE SYSTEM

# CF211-8 027 AA-BE 0500

1

2

3

4

5

6

7

### 1 MODEL NO.

CF211

### 2 CRI

8 >80  
9 >90

### 3 CCT

027 2700K  
030 3000K  
040 4000K

### 4 ANGLE

AA 10°x 10°  
CC 20°x 20°  
EE 30°x 30°  
LL 55°x 55°  
AF 10°x 35°

### 5 FIXTURE COLOURS

B Anodized Black

### 6 IP RATING

C IP40  
E IP67

### 7 LENGTH

0200 200mm  
0300 300mm  
0500 500mm

<sup>1</sup> Each product comes with 2 Mounting Brackets and 1 Safety Wire

<sup>2</sup> This product requires a constant current power supply, please contact WAKO for recommended models

<sup>3</sup> All data provided are typical values with manufacturing tolerances up to 10%

<sup>4</sup> For further requirements, please contact WAKO