

WAKO KOKI  
**KK501**



KK501 WHITE

---

## FEATURES

- Uniform Light Distribution
- Dotless effect
- High Color Rendering
- Single Bin
- Slim Design

## APPLICATIONS

- Architectural Lighting
- Diffused Lighting
- Indoor Lighting
- Direct/Indirect Lighting

Ra	95
R1	95
R2	97
R3	97
R4	94
R5	95
R6	95
R7	99
R8	97
R9	95
R10	96
R11	91
R12	90
R13	95
R14	97
R15	96



Gravity Club, Singapore

WAKO KOKI

# KK501 WHITE

## SPECIFICATIONS

### DIMENSION

Size	14.5 mm (W) x 15.5 mm (H)		
Unit length	1012 mm	512 mm	312 mm
Storage temperature	-20°C to 70°C		
Operating temperature	-10°C to 45°C		

### OPTICAL

Color temperature	2200K / 2400K / 2700K / 3000K 3500K / 4000K / 5000K
CRI	>95
SDCM	<2 / Single Bin
Lumen/meter (3000K)	460 lm (15W), 310 lm (10W), 230 lm (7W)
Lifetime LM-80	>60000 hrs


### ELECTRICAL

Power input	DC 24V		
Power consumption	15 W/m	10 W/m	7 W/m
Maximum length per circuit	5 m	7 m	10 m
Dimming (by external driver)	0-10V / 1-10V / DALI / DMX		


### CERTIFICATIONS

IP class	IP20
Safety standard	EN55015 EN61000-3-2 EN61000-3-3 EN61547 EN62031 EN62471 EN62493 EN62778

### EXTERNAL DIMENSION

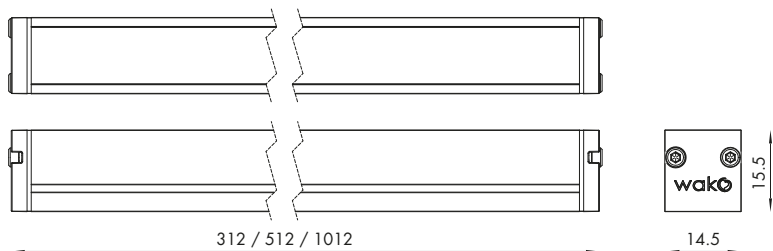

### PHOTOMETRIC



## ORDER CODE SYSTEM

# KK501-V 027-150- F B 0512

1      2      3      4      5

<b>1</b>	<b>CRI</b>			<b>4</b>	<b>CABLE ENTRY</b>	
	V	>95			F	Double Bottom
<b>2</b>	<b>CCT</b>			<b>5</b>	<b>LENGTH</b>	
	022	2200K			0312	312mm
	024	2400K			0512	512mm
	027	2700K			1012	1012mm
	030	3000K				
	035	3500K				
	040	4000K				
	050	5000K				
<b>3</b>	<b>POWER</b>					
	150	15 W/m				
	100	10 W/m				
	070	7 W/m				

<sup>1</sup> Each product comes with 2 Mounting Brackets;

<sup>2</sup> 200mm Connection Cable requires to be purchased separately;

<sup>3</sup> This product requires a constant voltage power supply, please contact WAKO for recommended models

<sup>4</sup> All data provided are typical values with manufacturing tolerances up to 10%

<sup>5</sup> For further requirements, please contact WAKO

\*1 Custom power consumption and color temperature options are available on request

## ACCESSORIES OPTIONS



Mounting Bracket  
M00055

