

WAKO KOKI
KK502



KK502 WHITE

FEATURES

- Uniform Light Distribution
- Dotless effect
- High Color Rendering
- Single Bin
- Multiple Mounting options
- Compact Size


APPLICATIONS

- Architectural Lighting
- Diffused Lighting
- Indoor Lighting
- Direct/Indirect Lighting



Ra	95
R1	95
R2	97
R3	97
R4	94
R5	95
R6	95
R7	99
R8	97
R9	95
R10	96
R11	91
R12	90
R13	95
R14	97
R15	96

Four Seasons Hotel, Jakarta

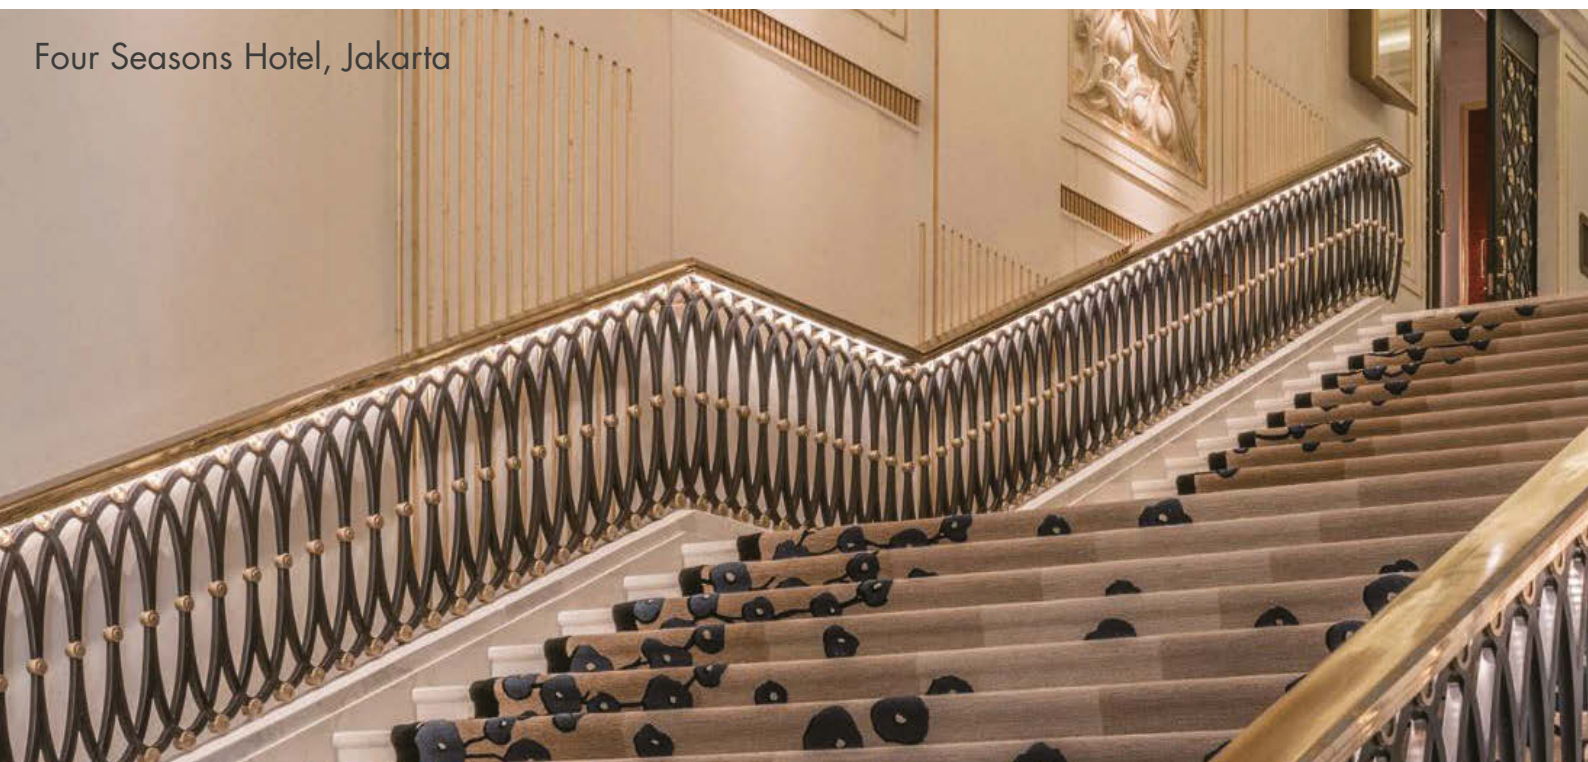

WAKO KOKI

KK502 WHITE

SPECIFICATIONS

DIMENSION

Size	19.5 mm (W) x 15.7 mm (H)		
Unit length	1012 mm	512 mm	312 mm
Storage temperature	-20°C to 70°C		
Operating temperature	-10°C to 45°C		

OPTICAL

Color temperature	2200K / 2400K / 2700K / 3000K 3500K / 4000K / 5000K
CRI	>95
SDCM	<2 / Single Bin
Lumen/meter (3000K)	1060lm (20W), 800 lm (15W), 530 lm (10W)
Lifetime LM-80	>60000 hrs


ELECTRICAL

Power input	DC 24V		
Power consumption	20 W/m	15 W/m	10 W/m
Maximum length per circuit	4 m	5 m	7 m
Dimming (by external driver)	0-10V / 1-10V / DALI / DMX		


CERTIFICATIONS

IP class	IP20
Safety standard	EN55015 EN61000-3-2 EN61000-3-3 EN61547 EN62031 EN62471 EN62493 EN62778

EXTERNAL DIMENSION

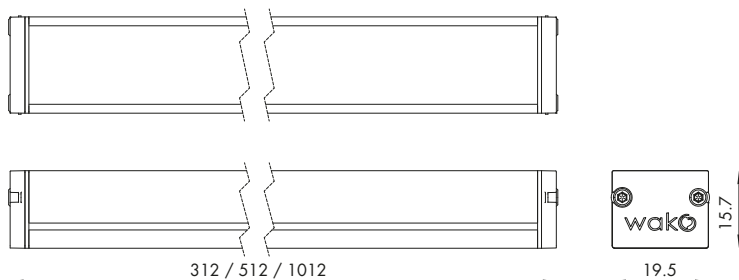

PHOTOMETRIC



ORDER CODE SYSTEM

KK502-V 027-200- F B 0512

1 2 3 4 5

1 CRI
V >95

2 CCT
022 2200K
024 2400K
027 2700K
030 3000K
035 3500K
040 4000K
050 5000K

3 POWER
200 20 W/m
150 15 W/m
100 10 W/m

4 CABLE ENTRY
F Double Bottom

5 LENGTH
0312 312mm
0512 512mm
1012 1012mm

¹ Each product comes with 2 Mounting Brackets;

² 200mm Connection Cable requires to be purchased separately;

³ This product requires a constant voltage power supply, please contact WAKO for recommended models

⁴ All data provided are typical values with manufacturing tolerances up to 10%


⁵ For further requirements, please contact WAKO

*1 Custom power consumption and color temperature options are available on request


ACCESSORIES OPTIONS



Mounting Bracket
M00075



Rotatable Mounting Bracket
M00076



45° Mounting Bracket
M00077

