




Thanks for the purchase of WAKO Light Bar Products. The package includes the following items:

1. Light Bar in specific length and CCT with various cable entry options (specified upon order):
 - Single End Entry
 - Double End Entry
 - Single Side Entry
 - Double Side Entry
2. Mounting Clips;
 - 2 mounting clips for each meter of strip
3. Power Cable for connecting to 24V DC Power Supply (Not Included)
 - Double End/Side Entry cable entry option has less cables

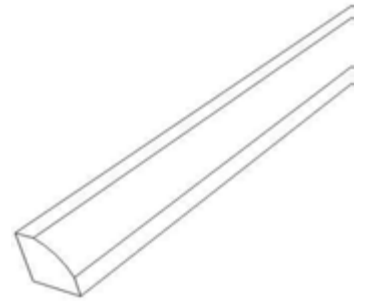

High Brightness Light Bars

DEN180002 R01

Installation Instructions:

- a). Unpack the package and check all the items included;
- b). Mark the appropriate positions for installing the Mounting Clips;
- c). Screw on the Mounting Clips with the Screws; ①
- d). Latch the Aluminum Profiles into the Mounting Clips; ②
- e). Plug in the Connectors between the Light Bars; ③
- f). Plug in one end of the Power Cable to the first Light Bar; ④
- g). Connect the other end of the Power Cable to the 24V DC Power Supply. The white wire is the +24V and the black wire is the -GND; ⑤
- h). Connect the Power Supply to the AC Power Source and the Light Bars are ready for use. ⑥



The Rating of power supply and the maximum number of Light Bar connected in series must NOT exceed the specifications of the products.

Connection Diagram:

