

# WAKO UNAGI TOP BEND UG084



## FEATURES

- Uniform Light Distribution
- High Color Rendering
- Single Bin
- Curvable Top Bend Light Formation
- IP65 Protection option

## APPLICATIONS

- Architectural Lighting
- Direct/Indirect Lighting
- Indoor Lighting



Ra	95
R1	95
R2	97
R3	97
R4	94
R5	95
R6	95
R7	99
R8	97
R9	95
R10	96
R11	91
R12	90
R13	95
R14	97
R15	96

# SPECIFICATIONS


## DIMENSION

Size	12 mm (W) x 12 mm (H)
Unit length	3000 mm
Cutlength	50 mm
Bending radius	60 mm
Storage temperature	-20°C to 70°C
Operating temperature	-10°C to 40°C

## OPTICAL

Color temperature <sup>*1</sup>	2700K / 3000K / 3500K / 4000K
CRI	>95
SDCM	<2 / Single Bin
Lumen/meter <sup>*2</sup>	580 lm (14W), 414 lm (10W), 309 lm (7W)
Lifetime LM-80	>60000 hrs

## EXTERNAL DIMENSION

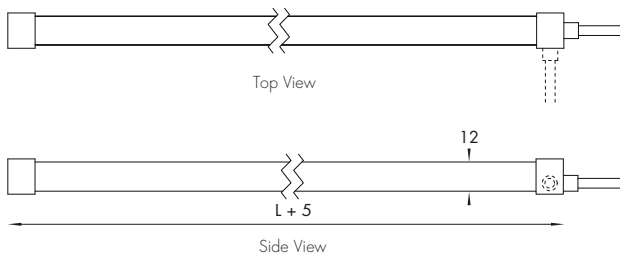


## ELECTRICAL

Power input	DC 24V		
Power consumption <sup>*1</sup>	14 W/m	10 W/m	7 W/m
Maximum length per circuit	5 m		
Dimming (by external driver)	0-10V / 1-10V / DALI / DMX		

## CERTIFICATIONS

IP class	IP65
Safety standard	IEC TR 62778 2011/65/EU 2015/863/EU

## PHOTOMETRIC

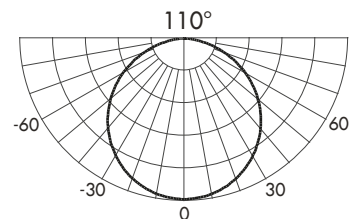

## BEND DIRECTION




<sup>\*1</sup> Custom power consumption and color temperature options are available on request

<sup>\*2</sup> Typical value based on 3000K, CRI>95


# ACCESSORIES OPTIONS




Mounting Bracket <sup>\*1,2</sup>  
M00133



1m Mounting Rail Straight <sup>\*1,2</sup>  
M00187



1m Mounting Rail Flexible <sup>\*1,2</sup>  
M00186



<sup>\*1</sup> This mounting method is not suitable for Bottom Cable Entry  
<sup>\*2</sup> To be installed with M3 flat head screws (not included)

## ORDER CODE SYSTEM

# UG084-V 027-140-B D 5000

1      2      3      4      5

### 1 CRI

V      >95

### 2 CCT\*<sup>1</sup>

027	2700K
030	3000K
035	3500K
040	4000K

### 3 POWER\*<sup>1</sup>


140	14 W/m
100	10 W/m
070	7 W/m

### 4 CABLE ENTRY

A	Single Straight
B	Double Straight
C	Single Side
D	Double Side
E	Single Bottom
F	Double Bottom

### 5 LENGTH

5000 5000mm

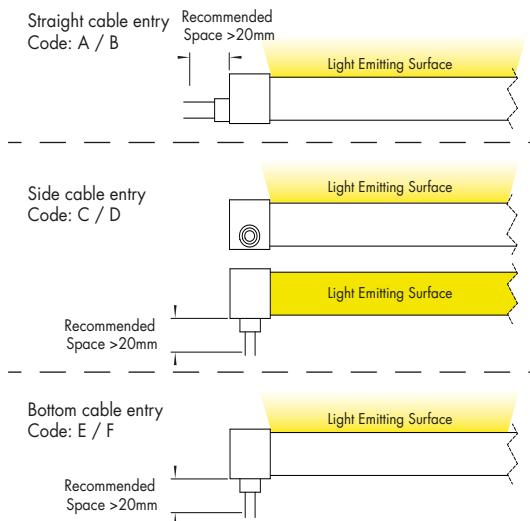

<sup>1</sup> Each product comes in reel of 5m length

<sup>2</sup> This product requires a constant voltage power supply, please contact WAKO for recommended models

<sup>3</sup> All data provided are typical values with manufacturing tolerances up to 10%

<sup>4</sup> For further requirements, please contact WAKO

\*<sup>1</sup> Custom power consumption and color temperature options are available on request